Taymor® | PRODUCT SPECIFICATIONS

CENTINEL 3 BLUETOOTH
DIGITAL DEADBOLT

SPECIFICATIONS

› IOS & ANDROID COMPATIBLE
› MOBILE APP CONTROL - MONITOR, GRANT AND REVOKE ACCESS
› AUTOMATICALLY LOCKS AND UNLOCKS
› USE A DIGITAL CODE OR A KEY
› APP CONTROL: MANAGE THE LOCK FROM YOUR SMARTPHONE
› PROGRAM UP TO 200 USER CODES
› VOLUME CONTROL
› SINGLE ENTRY USER CODE OPTION
› VACATION MODE
› LOW BATTERY INDICATOR
› UNIVERSAL 6 IN 1 LATCH: DRIVE-IN, SQUARE AND RADIUS CORNER
› STANDARD BORE HOLE SIZES: 2-1/8˝ (54 mm) OR 1-1/2˝ (38 mm)
› ADJUSTABLE BACKSET: 2-3/8˝ (60 mm) - 2-3/4˝ (70 mm)
› STANDARD DOOR THICKNESS: 1-3/8˝ (35 mm) TO 2˝ (51 mm)
› FULLY REVERSIBLE
› OPERATES ON 4X AA BATTERIES (SOLD SEPARATELY) NO HARDWIRING REQUIRED
› FULLY OPERATIONAL WITH CONVENTIONAL KEY (2 INCLUDED)
› KEYWAY IS 6-PIN WR5 CYLINDER- COMES KEYED TO 5-PIN STANDARD
› OPERATION TEMPERATURE -35C TO 66C (-31F TO 150.8 F)
› FULL RESET CAPABILITIES PROVIDED
› LIFETIME MECHANICAL AND 5 YEAR FINISH WARRANTY
› 1 YEAR WARRANTY ON ALL ELECTRICAL COMPONENTS

EXTERIOR VIEW   INTERIOR VIEW

GRADE 2
ANSI COMPLIANT

20 MINUTE FIRE RATED

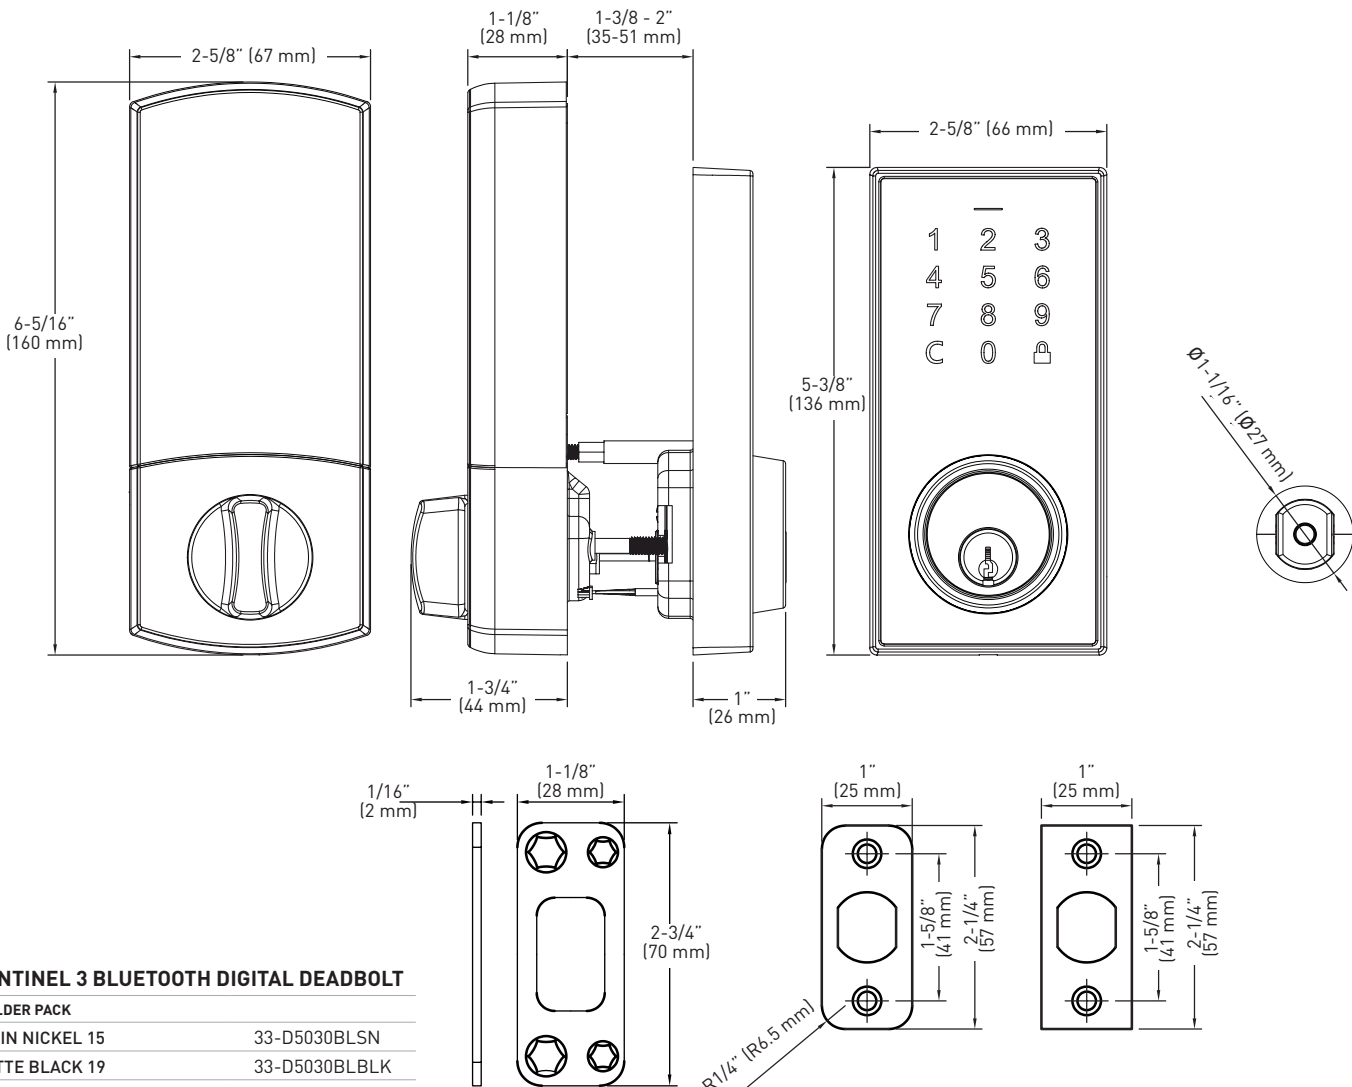FULL KEYING SERVICES AVAILABLE

MOBILE APP CONTROL

AUTO LOCK/UNLOCK OPTIONS

cUL LISTED

MEETS ADA STANDARDS

2-5/8˝ (67 mm)

1-1/8˝ (28 mm)

1-3/8 - 2˝ (35-51 mm)

2-5/8˝ (66 mm)

6-5/16˝ (160 mm)

5-3/8˝ (136 mm)

Ø1-1/16˝ (Ø27 mm)

1-3/4˝ (44 mm)

1˝ (26 mm)

1/16˝ (2 mm)

1-1/8˝ (28 mm)

2-3/4˝ (70 mm)

1˝ (25 mm)

1-5/8˝ (41 mm)

2-1/4˝ (57 mm)

R1/4˝ (R6.5 mm)

1˝ (25 mm)

1-5/8˝ (41 mm)

2-1/4˝ (57 mm)

CENTINEL 3 BLUETOOTH DIGITAL DEADBOLT

BUILDER PACK	
SATIN NICKEL 15	33-D5030BLSN
MATTE BLACK 19	33-D5030BLBLK
POLISHED CHROME 26	33-D5030BLPC
CASE QTY. 6	

TAYMOR RECOMMENDED INSTALLATION HEIGHTS
CONSULT WITH THE AUTHORITY HAVING JURISDICTION FOR COMPLETE CODE REQUIREMENTS

2-3/8"-2-3/4"
(60 mm - 70 mm)

HATCH LINE
INDICATES
DEADBOLT

48"
(122 cm)

OPERATION OF HARDWARE
TO MEET ADA REQUIREMENTS
34" TO 48" FROM FINISH FLOOR

BORE HOLE DIA.
2-1/8"
(54 mm)

5-1/2"
(140 mm)

34"
(86 cm)

HATCH LINE
INDICATES
LEVER

36" (915 mm)

LINE OF FINISH FLOOR